




Saves Your Energy

SV15.5

Name: **Branching connector set**
4xKE10.1 and 1xKE10.3 (10-35Al/1.5-25Cu)
Type: SV15.5
EAN: 6418677405716

Description: SV 15.5 includes three phase connectors KE10.1, one neutral connector KE10.1 earthing connector and an 16 mm² earth wire of 0.35 m with a cable lug. □
□
SV50 includes three phase connectors KE10.504, one neutral connector KE10.506 and a 16 mm² earth wire of 0.35 m with a cable lug. SV50.11 includes also fuse base SVV1.10.

Package: 10/1050
Unit: PCS

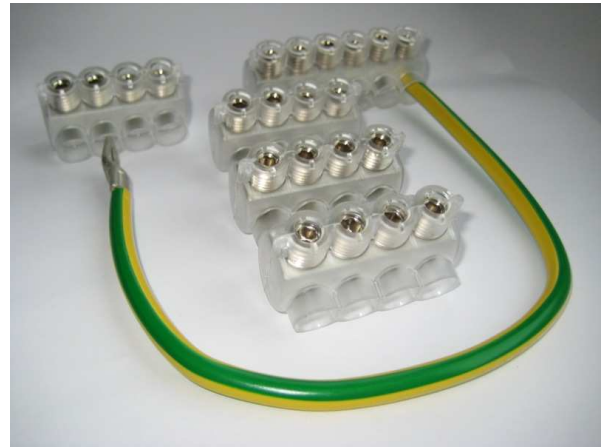

Technical specification

Parts: 4xKE10.1 + KE10.3
Weight (kg): 0.304

KE10.1

Name: **Branching connector**
Al 4x10-35 mm² / Cu 1.5-25 mm²
Type: KE10.1
EAN: 6418677400049

Description: KE10.1 connector can be used for aluminum and copper conductors. Tightening torque is 10 Nm. The connectors are used either inside metal poles or in separate boxes.

Package: 50/5250
Unit: PCS



Technical specification

Colour: transparent
Weight (kg): 0.044
Conductor diameter mm: 1.7-9.0
For conductor mm²: 4 x (Al 10-35 / Cu 1.5-25)
Tightening torque Nm: 10

